




## BarsavaSanat Boring Machine



TECHNICAL SPECIFICATIONS		Unit	Motors		Unit
Power Transfer System	Hydraulic - Motor GearBox - ServoMotor	none	Spindle Motor	4, 5/5	KW
Spindles	one - three	none	Motor for Boring Feed (SBM Only)	5	N.M
Boring Range	45 to 135	mm	Motor for Boring Feed (GBM Only)	1.5	KW
Head Travel	250 to 620	mm	Motor for Table Movement (SBM Only)	750	W
Distance Spindle Head to Column	310 to 560	mm	<b>Unit</b>		
Max. Distance Clamp Slide to Table	70 to 650	mm	H x L x W (For BM 300)	1900 x 1690 x 960	mm
Spindle Speed	80 to 700	rpm	H x L x W (For BM 120)	1950 x 1430 x 960	mm
Boring Feed	0/05 to 0/5	mm/rev	H x L x W (For BM 110)	1950 x 850 x 960	KW

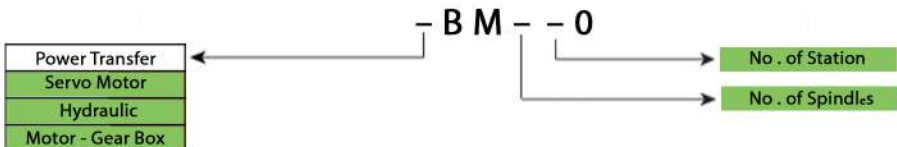




Model:GBM120



Model:HBM300



Hydraulic Clamp

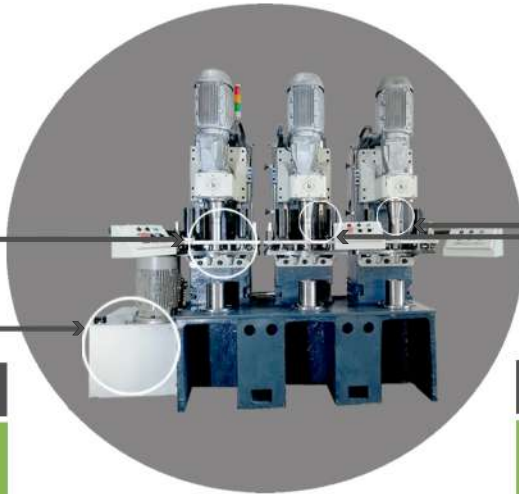

Linear Guide

Automatic Central  
Lubrication System



Spindle



Scan to see how the device works.



Model:GBM120



Model:HBM300

Contact us :



Barsava\_Sanat



[www.BarsavaSanat.ir](http://www.BarsavaSanat.ir)



Chaheshk-Mashhad-Iran



09100547299 - 05136611165